


AEROPLEAT METAL FILTER

MORE EFFECTIVE PRODUCTS BROUGHT TO YOU BY

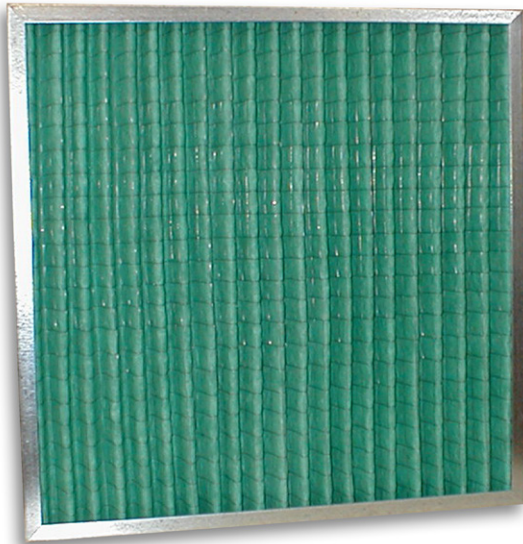

ADVANTAGES

- Low pressure drop media resulting in low energy costs
- Rigid frame for demanding applications. Fire classified M1
- Robust construction for reliable operation

Application: Pre filter for comfort air conditioning applications

Type: Pleated Panel

Frame: Metal

Media: Cotton/Synthetic

Dimensions: Filter front dimensions according EN 15805

Rec. final pressure drop acc. EN 13053: 150 Pa

Maximum airflow: 1,1 x nominal flow

Temperature max: 70°C

RH. max: 100%

Mounting/Frames: Front and side access housings and frames are available

Type	EN779	ISO16890	Dimensions WxHxD (mm)	Air Flow/pressure drop (m ³ /hr/Pa)	Media area (mm)	Weight (kg)
Metal	G4	Coarse 65 %	592x592x50	3400/55	1,1	2,2
Metal	G4	Coarse 65 %	287x592x50	1650/55	0,5	1,7
Metal	G4	Coarse 65 %	610x610x50	3600/55	1,2	2,3
Metal	G4	Coarse 65 %	305x610x50	1800/55	0,6	1,7
Metal	G4	Coarse 65 %	500x500x50	2400/55	0,8	1,7
Metal	G4	Coarse 65 %	400x500x50	1900/55	0,6	1,5
Metal	G4	Coarse 65 %	500x625x50	3000/55	1,0	2,3

Other dimensions are available on request - All dimensions are nominal



Gibson Booth, 12 Victoria Road, Barnsley, South Yorkshire, S70 2BB, United Kingdom.

t +44 (0) 1159 659539 e info@magnacool.co.uk w www.magnacool.co.uk